

FIGURE 1

Patented May 19, 1993

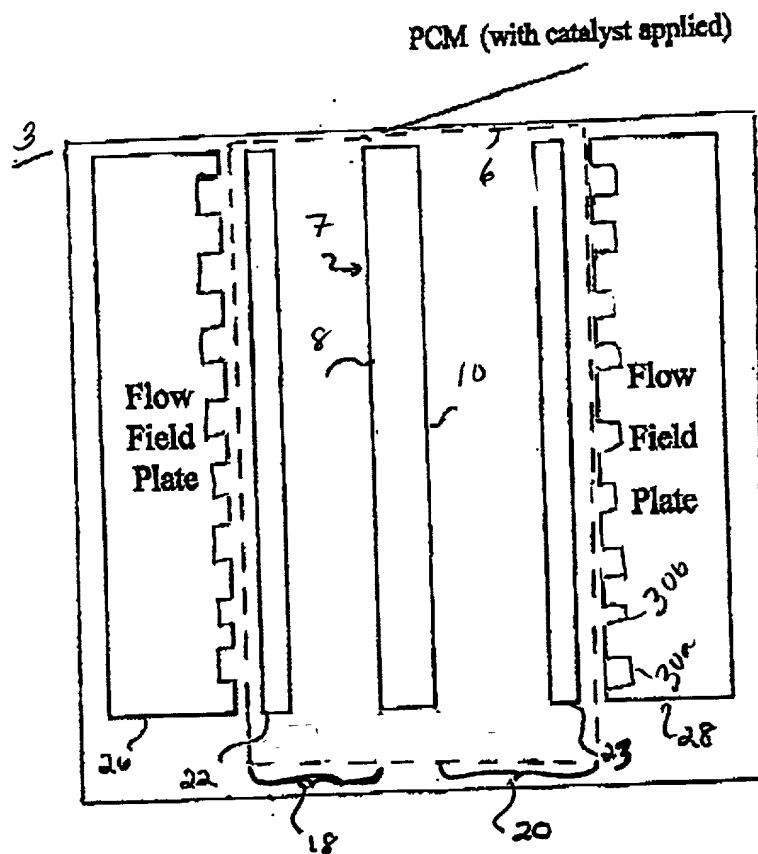


Fig. 2

Pat. No. 6,699,999

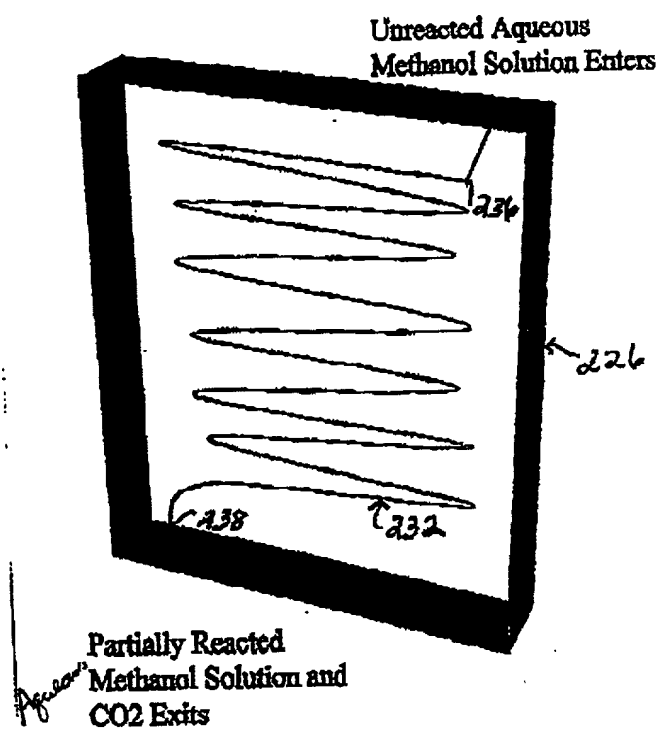


Fig. 2A

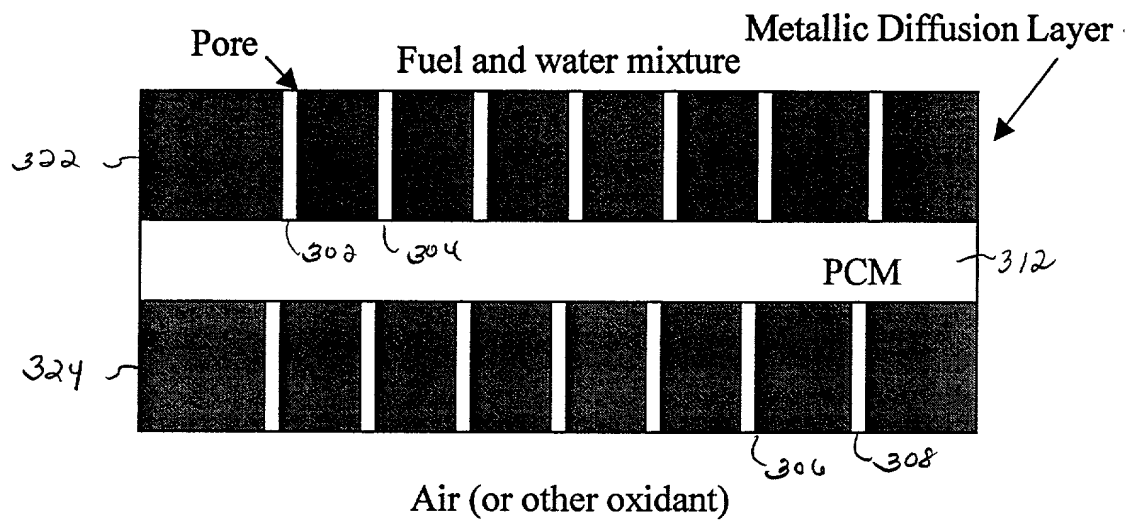


Fig. 3A

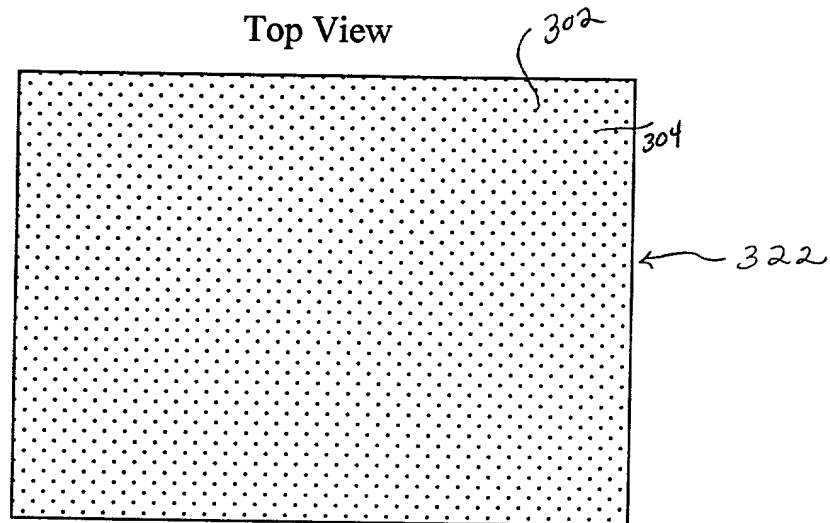


Fig. 3B

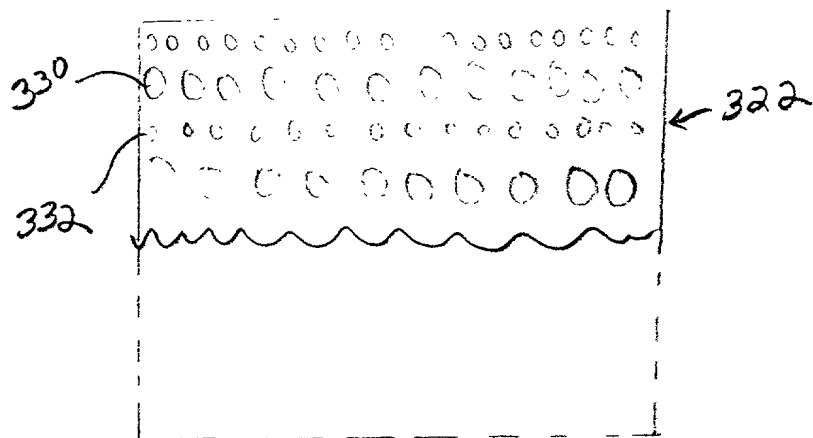


FIG. 3C

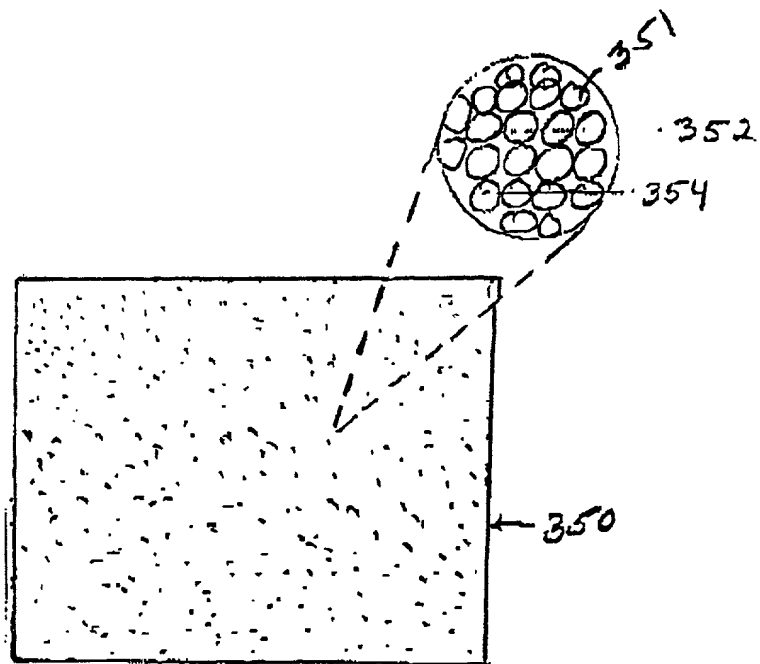
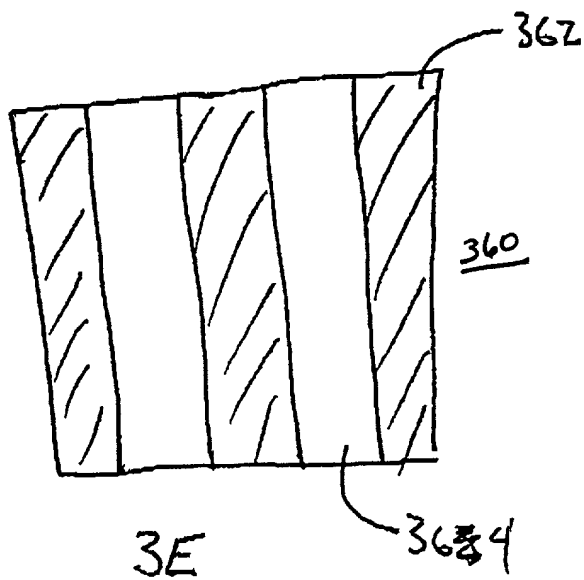


Fig. 3D



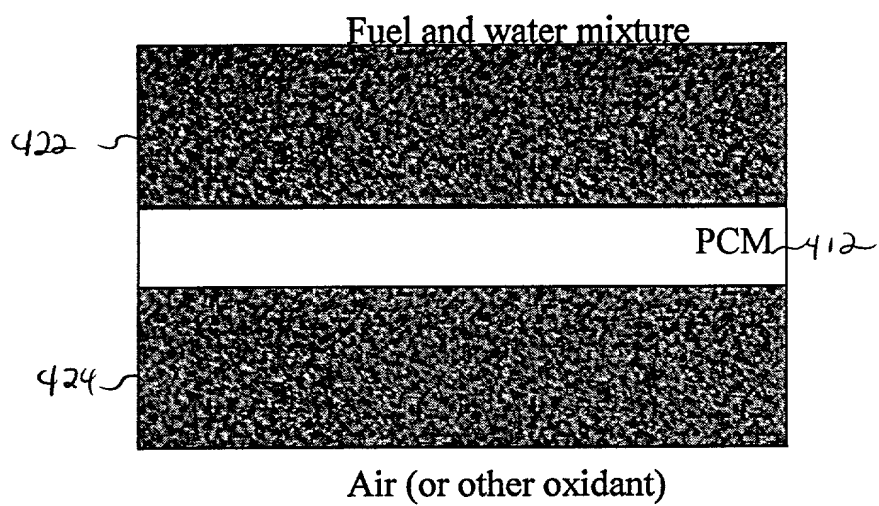


Fig. 4A


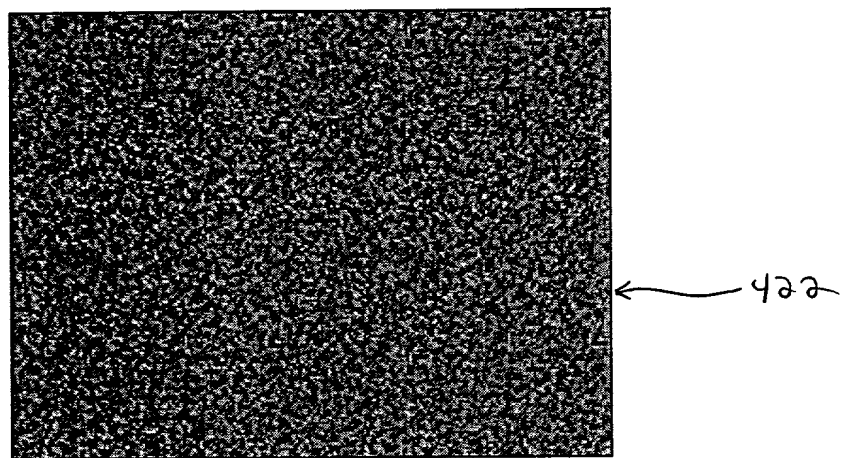


Fig. 4B

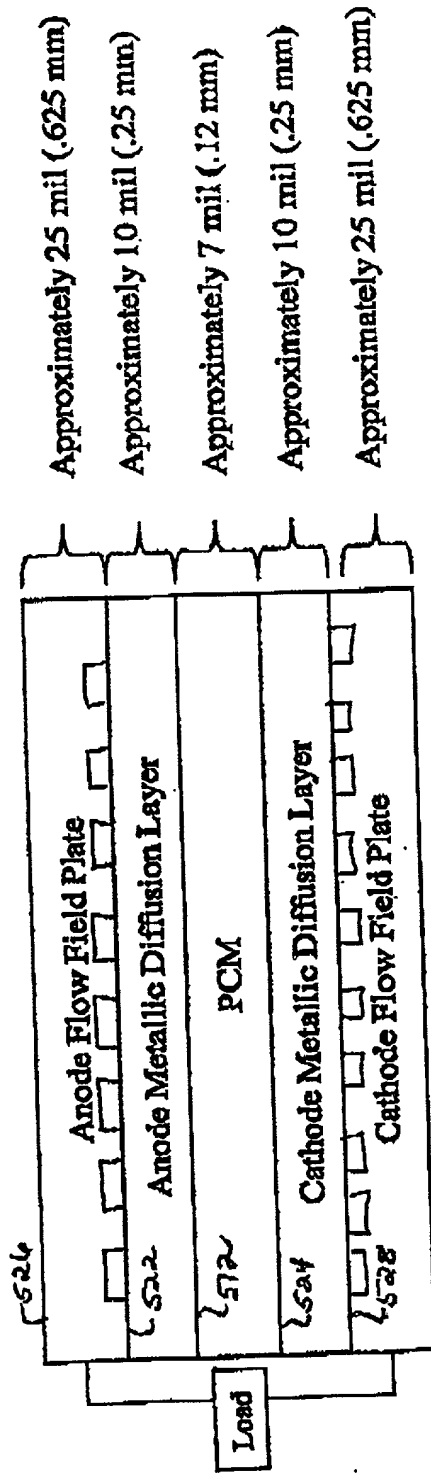

Thickness Savings of 10 mm in First Embodiment of the Invention



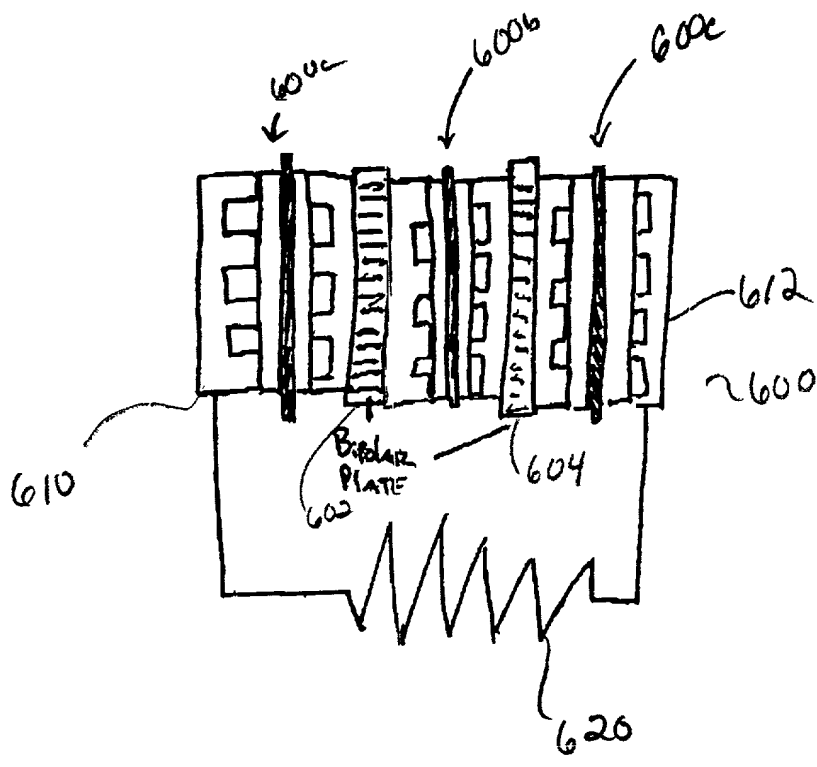
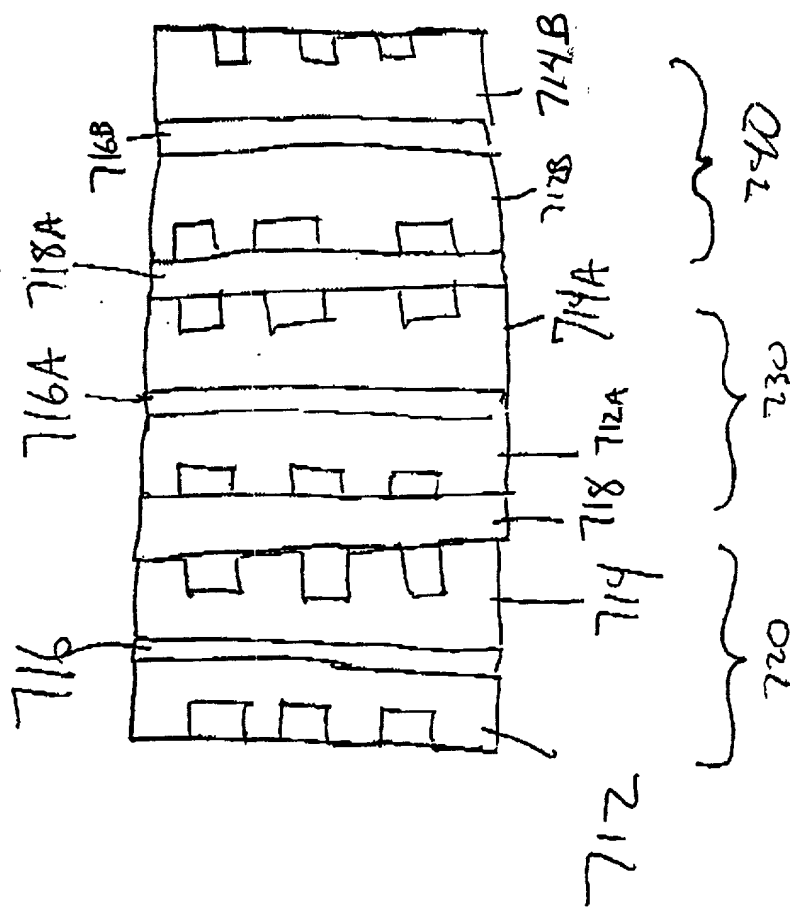
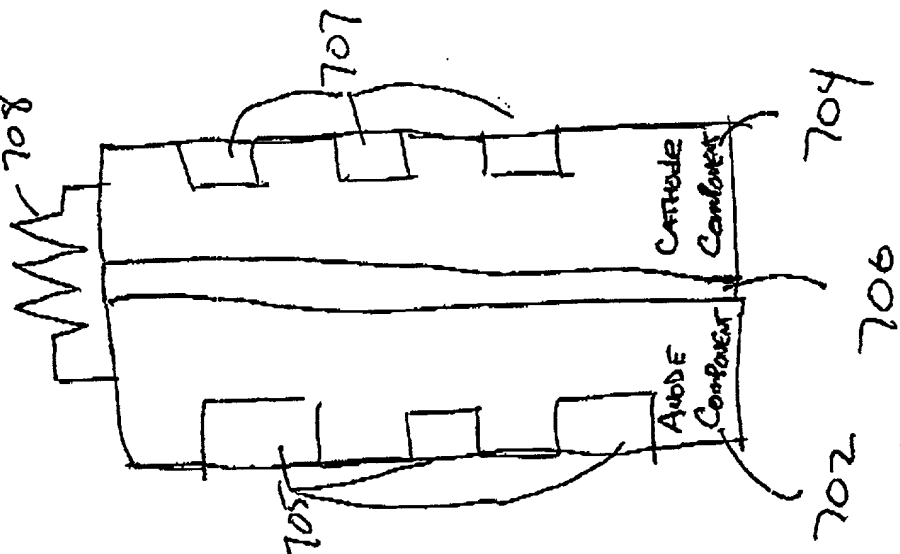


Fig. 6

Fig 7A

Fig 7A



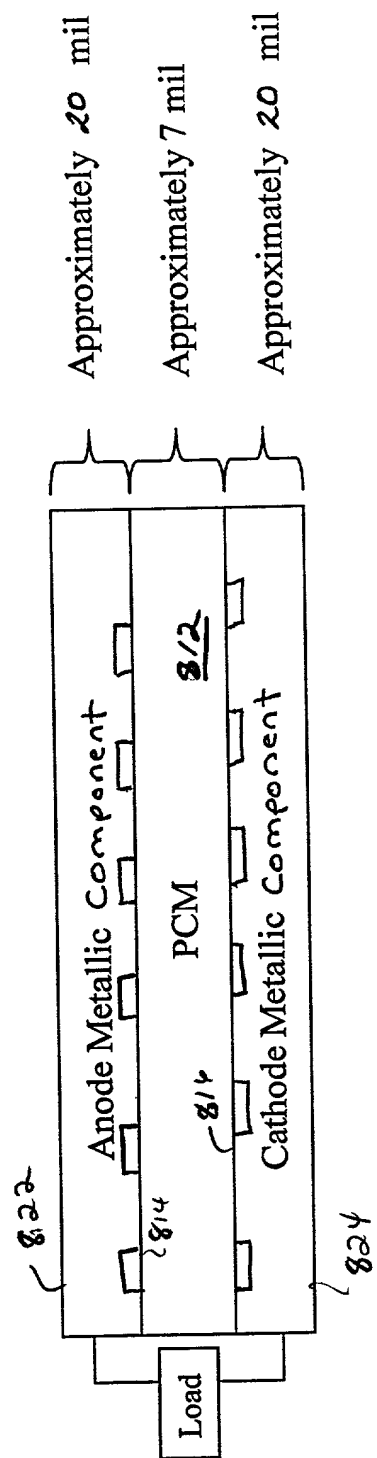


Fig. 8